



**WE GO
GLOBAL!
CONTAINERBOARD**

HISTORY

MAIN STAGES OF SFT GROUP DEVELOPMENT

2003

Acquisition of the Kamenskaya Paper and Board Mill

2005

Aleksinskaya Paper and Board Mill became a member of the Group

2006

UVI SPb, a plant for collection and initial processing of recovered paper, appeared in the structure of the company.

SFT Group became the first vertically integrated company of the pulp and paper industry in Russia

2007

Kartontara, the major enterprise for production of containerboard and corrugated packaging in the south of Russia, became a member of the Group

2011

Famadar Kartona Limited, a producer of corrugated packaging, joined the Group

2013

A new paper mill of SFT Group was put into operation at the site of Kamenskaya Paper and Board Mill

2019

Joint venture agreement with the Austrian Prinzhorn Group with 50/50% equity participation

STRUCTURE


We are Russian vertically integrated holding with the leadership at Recycled material collection and paper and packaging manufacturing



**is a vertically
integrated
company**



Recycling



Containerboard



**Corrugated
packaging**

CONTAINERBOARD DIVISION

SFT GROUP



#1

Russia's recycled
containerboard market




#1

Russia's RCCM export
leader



#1

In service
and innovation



ECO

Environmental
responsibility
and sustainable
development
is our focus: we
produce from 100%
recycled materials



Certificates

FSC, ISO 9001
certificated



Experts

in the entire production
chain more than 15 years



500 thousand tons
of containerboards
per year

GEOGRAPHY & LOCATIONS

OUR FACTORIES LOCATED AT THE EUROPEAN PART OF RUSSIA



1

SFT Kamenskaya

5 PMs – 4 x 2100mm + 1 x 4600mm

Tver Region, Kuvshinov city

2

SFT Aleksinskaya

1 PM – 4200mm

Tula Region, Aleksin city

3

SFT KARTONTARA

1 PM – 4200mm

Republic of Adygeya,
Maykop city

OUR SPECIAL GLOBAL PRODUCTS

THE RANGE OF BROWN TESTLINERS & FLUTINGS FOR HIGH-SPEED CORRUGATORS



**Liner 1, Liner 2 (100–225 gms)
Medium HP, Medium
(90–175 gms)**

- High-printing quality.
- High-performance
& mechanical properties: BCT, SCT CD and etc.



**Liner KS, Medium KS
from 110 gms to 225 gms**

- Resistance of packaging to high humidity
- Suitability of packaging for low temperatures and freezing
- Use of ecological recycled packaging (100% OCC) instead of virgin fiber




We happy to offer export partners our BEST products!

Our TESTLINER

IS SPECIALLY OPTIMIZED FOR HIGH-QUALITY PRINTING



**ORDINARY TESTLINER
(ROUGH SURFACE)**

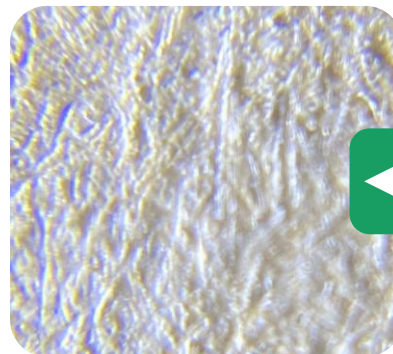

**SFT Testliner
(smooth surface)**

OUR IMPROVED TESTLINER & FLUTING

Liner 1, Liner 2, Medium HP

THE OPTIMAL CHOICE FOR PRODUCTION OF ORDINARY CASES AND TRAYS



Standard RSC



Die Cut



SRP

OUR SPECIAL TESTLINER & FLUTING


Liner KS, Medium KS

BEST CHOICE FOR PRODUCTION OF CASES AND TRAYS FOR


Frozen food




Dairy products

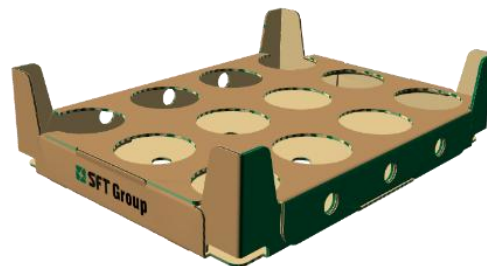

Salads, fruits and vegetables

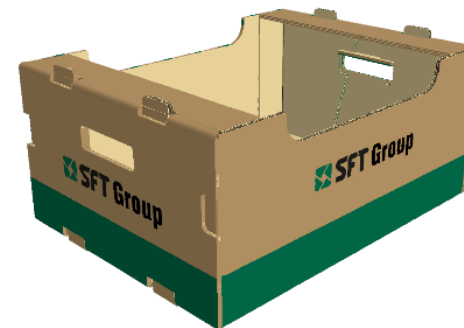

Fresh chilled products (chicken, meat)

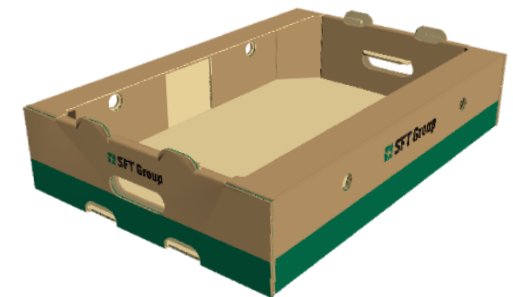




WE GO GLOBAL!

CONTAINERBOARD



Andrey Melnik


Head of Export Operations at SFT Group CD
andrey.melnik@sftgroup.ru

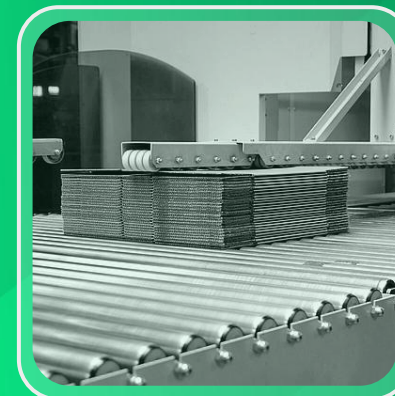



PRODUCT SPECIFICATIONS

APPENDIX

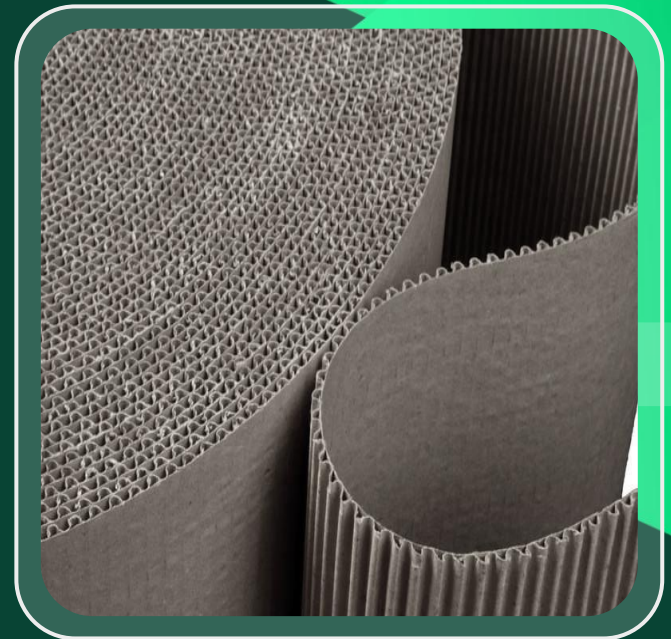

SFT TESTLINERS

SFT LINER 1

High-performance testliner

	100	110	120	125	135	150	160	175	200
Substance, g/m2	±3								
BST, kPa, min	260	286	312	325	350	390	416	455	520
Cobb60, g/m2	40								
Moisture, %	6,0 – 9,0								
SCT CD, kN/m, min	1.96	2.16	2.36	2.45	2.65	2.94	3.14	3.44	3.60

SFT TESTLINERS

SFT LINER 2	Standard testliner									
	100	110	120	125	135	150	160	175	200	225
Substance, g/m2	±3									
BST, kPa, min	220	242	264	280	320	350	375	400	440	500
Cobb60, g/m2	40									
Moisture, %	6,0 – 9,0									
SCT CD, kN/m, min	1.75	1.96	2.16	2.36	2.45	2.65	2.94	3.14	3.30	3.60

SFT TESTLINERS

SFT LINER 4

Cost-saving testliner

	80	90	100	110	120	125	135	150	160	175	200
Substance, g/m2	±6										
BST, kPa, min	147	166	184	203	221	230	248	276	294	322	368
Cobb60, g/m2	40										
Moisture, %	6,0 – 9,0										
SCT CD, kN/m, min	1,12	1,26	1,4	1,56	1,72	1,92	2,12	2,31	2,4	2,6	2,88

SFT TESTLINERS

SFT LINER KS	Kraftliner Substitute						
	110	120	135	150	175	200	225
Substance, g/m2	±3						
BST, kPa, min	345	370	410	450	490	540	590
Cobb60, g/m2	40						
Moisture, %	6,0-9,0						
SCT CD, kN/m, min	2,30	2.45	2.70	3.00	3.45	3.70	3,95

SFT FLUTINGS

SFT MEDIUM

Standard fluting

	100	110	120	125	135	150	160	175	200	225
Substance, g/m2	±3									
BST, kPa, min	172	189	216	225	243	270	288	315	340	360
Cobb60, g/m2	40									
Moisture, %	6,0 – 9,0									
SCT CD, kN/m, min	1.75	1.93	2.10	2.19	2.37	2.63	2.80	3.07	3.40	3.60

SFT FLUTINGS

SFT MEDIUM

Standard fluting

	80	90	100	105	110	120	125	135	140	150	160	175	200
Substance, g/m2	±6												
CMT0, N, min	112	126	140	147	154	168	175	189	196	210	224	245	250
Cobb30, g/m2	40												
Moisture, %	6,0 – 9,0												
SCT CD, kN/m, min	1,14	1,28	1,43	1,5	1,57	1,71	1,78	1,93	2	2,14	2,28	2,5	2,79

SFT FLUTINGS

SFT MEDIUM HP

High-performance fluting

	100	110	120	125	135	150	160	175	200
Substance, g/m2	±3								
BST, kPa, min	190	211	230	240	260	288	307	330	350
Cobb60, g/m2	40								
Moisture, %	6,0 – 9,0								
SCT CD, kN/m, min	1.96	2.16	2.35	2.45	2.65	2.94	3.14	3.44	3.60

SFT FLUTINGS

SFT MEDIUM KS

Semi-chemical Fluting Substitute

	110	120	135	150	160	175	200	225
Substance, g/m2	±3							
CMT0, N, min	215	235	265	300	315	340	370	400
Cobb30, g/m2	35-90							
Moisture, %	6,0 – 9,0							
SCT CD, kN/m, min	2.20	2.40	2.70	3.00	3.15	3.45	3.70	3,95

SFT FLUTINGS

SFT MEDIUM K

Our special packaging paper

	65	70	78	80	85	90
Substance, g/m2	±3					
CMT0, N, min	91	98	109	112	119	126
Cobb30, g/m2	35					
Moisture, %	6,0 – 9,5					
SCT CD, kN/m, min	0,93	1	1,1	1,14	1,21	1,28

SFT FLUTINGS

SFT Kraftliner A

Our special Kraftliner

	78	85
Substance, g/m2	±6	
CMT0, N, min	73 36	70 34
Cobb30, g/m2	35	
Moisture, %	6,0 – 9,5	
SCT CD, kN/m, min	5,5 2,8	6,3 3,0